

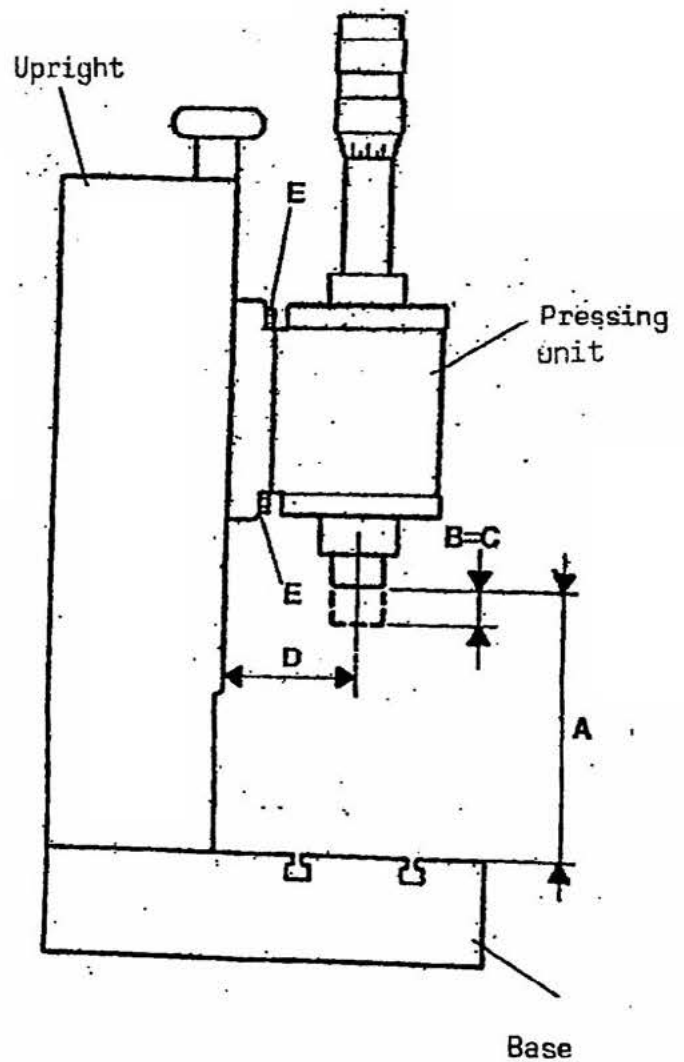


## Pneumatic presses with fine adjustment of the stroke

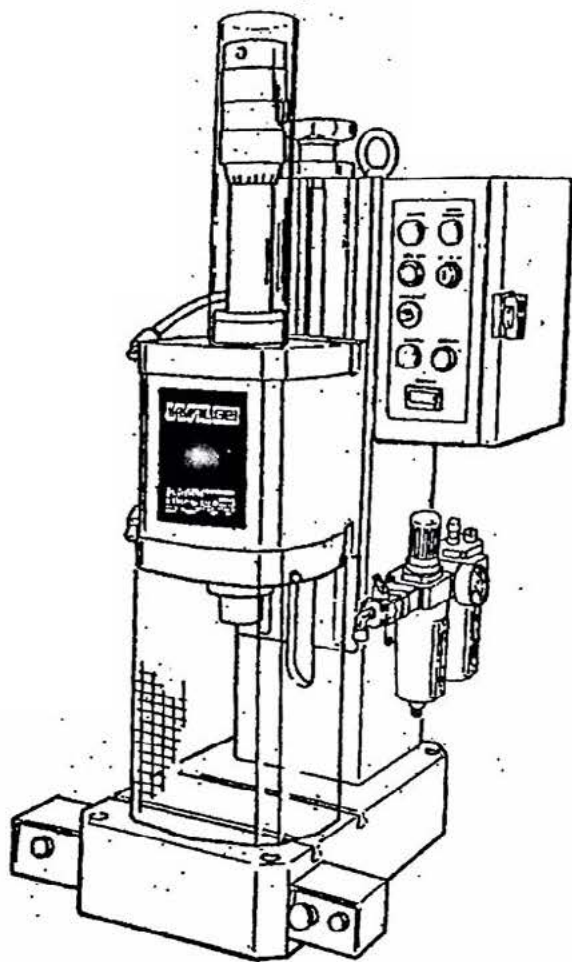

Mod.		1PP5-10	2PP20-A.10
-Ingombro	min. (mm) max. (mm)	510x421x670 565x421x670	764x495x640 898x495x640
-Luce max. (A)	(mm)	203	348
-Corsa di lavoro (B)	(mm)	0+50	0+100
-Corsa totale (C)	(mm)	0+50	0+100
-Sbraccio (D)	(mm)	80	120
-Pressione d'esercizio	(MPa)	0,2+0,8	0,2+0,8
-Spinta per 0,1 MPa	(daN)	49	182
-Forza totale di lavoro a 0,5 MPa	(daN)	245	960
-Forza di ritorno a 0,5 MPa	(daN)	201	907
-Peso	(kg)	59	141
-Tensione alimentazione	(V/ Hz)	220/50	220/50
-Coppia di serraggio unità al montante (E)	(Nm)	65	97

## Pneumatic presses unit with fine adjustment of the stroke

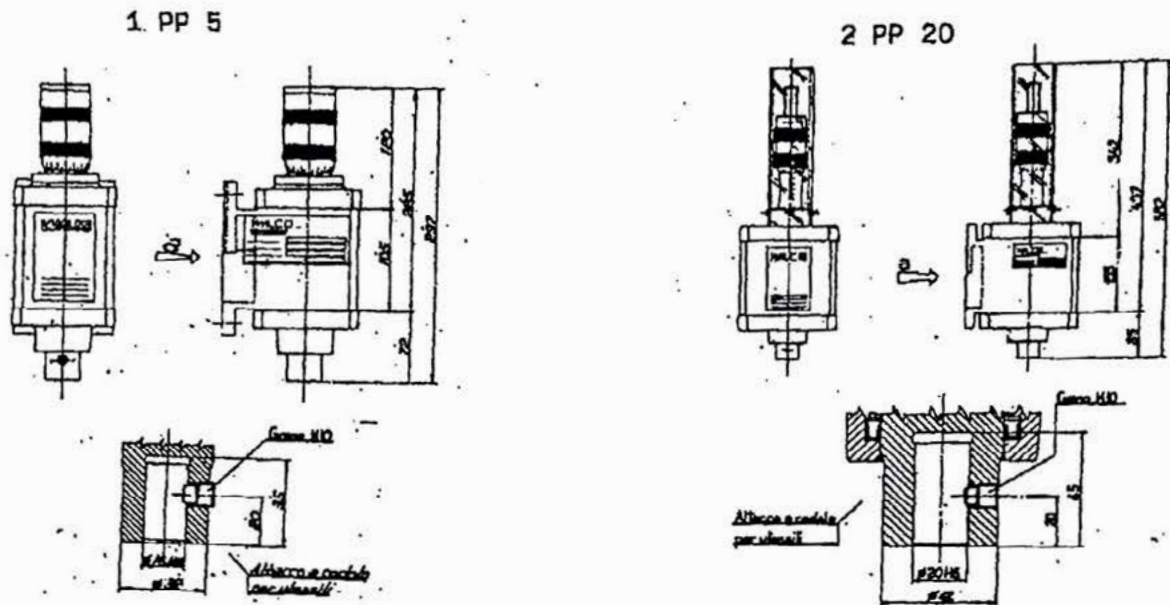

<u>Technical data</u>		<u>1 PP 5</u>	<u>2 PP 20</u>
Capacity at 0,1 MPa	Da N	49	192
Max. stroke of ram.	mm.	50	100
Adjustable stroke	mm.	0÷50	0÷100
Hole for tool shank	mm.	∅ 16x35	∅ 20x45
Max. air pressure	MPa	0,8	0,8
Max. force at 0,8 MPa	Da N	392	1536
Weight	Kg	9	28,6